




Heyco® RDD Right Angle Lockit™ Strain Relief Bushings

For Round Cables

- Automated application equipment speeds assembly and lowers costs while reducing or eliminating repetitive manual assembly motions.
- See page 3-1 for Heyco's Automated Pre-Assembly Equipment.
- Installs easily with fingertip pressure into a standard round or Double "D" hole. No clumsy hand tools required!
- Assembly friendly! Independent of insertion into the panel, RDD Right Angle Lockit Strain Reliefs self-lock onto the cable. Thus, they may be preassembled offline for final assembly at a later time or remote location, for lower installed cost!
- Multiple panel locking steps secure lockit strain relief into range of panel thicknesses.
- Consult Heyco for other wire types and sizes.

WILL FIT THESE CABLES				PANEL DIMENSIONS				PART NO.	DESCRIPTION
UL Type Designation	AWG Conductors	Approximate Size		Mounting Hole Size		Thickness			
		in.	mm.	in.	mm.	in.	mm.		
AWM SJTO & SJO	18/2	.130	3,3	.625 w/ .550 flats	15,9 w/ 14,0 flats	.032	0,8	1816	RDD 101A-90
		.210	5,3			.040	1,1		
SV SVT	18/3	.220	5,6	.625 w/ .550 flats	15,9 w/ 14,0 flats	.048	1,2	1818	RDD 101-90
		.290	7,4			.063	1,6		
SJTO & SEO	18/2 18/3	.290	7,4	.875 w/ .770 flats	22,2 w/ 19,6 flats	.063	1,6	1820	RDD 201-90
		.385	9,8			.099	2,5		
SJ & SJO	18/2 14/2	.340	8,6	.875 w/ .770 flats	22,2 w/ 19,6 flats	.126	3,2	1824	RDD 301-90
		.430	10,9			.157	4,0		

Standard color black. Consult Heyco for white and other colors.

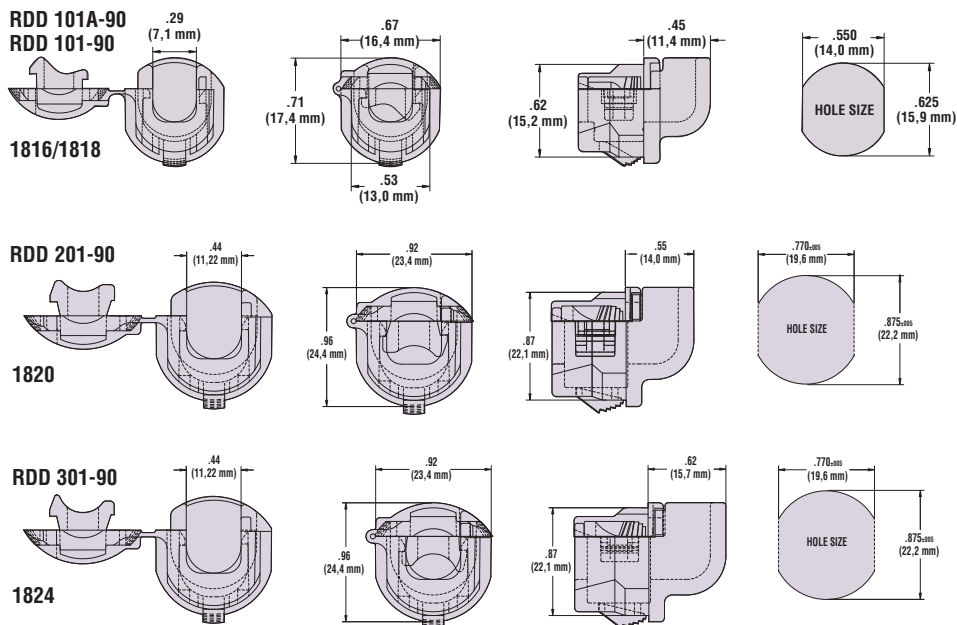

Quick Specs

Material Certifications

6/6 Nylon

Recognized under the Component Program of Underwriters' Laboratories File E15331 (far exceeds UL's 35# pull-out test).

Certified by the Canadian Standards Association File LR8919.

Flammability Rating

94V-2

Material Temperature Index

257°F (125°C)—Maximum temperature on part not to exceed 221°F (105°C).