



Heyco® Straight-Thru Strain Relief Bushings

For Flat Cables



UL Type Designation	WILL FIT THESE CABLES		PANEL DIMENSIONS						PART NO. Black	DESCRIPTION	C BODY LENGTH		
	AWG/ Conductors	Approximate Size		A		B		Maximum ¹ Panel Thickness			In.	mm.	
		in.	mm.	Mounting Hole Dia. in.	mm.	To Prevent Rotation in.	mm.	in.					mm.
HPN & SPT-2	16/3	.16x.37	4,1x9,4	.562	14,3	.530	13,5	.125	3,2	1174	SR 5W-1	.609	15,5
	18/3	.15x.40	3,8x10,2										
	16/3	.16x.41	4,1x10,4										
SPT-2	18/3	.15x.40	3,8x10,2	.560*	14,2	.730*	18,5	.125	3,2	1484	SR 30-1*	.672	17,1
	16/3	.16x.41	4,1x10,4										
SPT-3	18/2	.19x.35	4,8x8,9	.625	15,9	.550	14,0	.062	1,6	1160	SR 6N4-4	.578	14,7
	18/3	.19x.39	4,8x9,9										
	16/2	.20x.37	5,1x9,4										
SPT-2	18/3	.15x.40	3,0x7,6	.125	2,5					1163	SR 6P4-4	.578	14,7
	16/3	.16x.41	4,1x10,4										
Same as SR 6N4-4 above except													
SPT-3	16/2	.20x.37	5,1x9,4	.750*	19,0	.875*	22,2	.125	3,2	1504	SR 33-1*	.781	19,8
	16/3	.20x.43	5,1x10,9										
	14/2	.24x.42	6,1x10,7										
	14/3	.24x.51	6,1x12,9										
SPT-3	14/2	.24x.42	6,1x10,7	.875	22,2	.840	21,3	.125	3,2	1517	SR 34-2	.813	20,7
	14/3	.24x.51	6,1x12,9										
	12/2	.29x.51	7,4x12,9										
	12/3	.29x.65	7,4x16,5										
SPT-3	12/3	.32x.65	8,1x16,5	.875	22,2	.840	21,3	.125	3,2	1497	SR 31-2	.813	20,7
	10/3												
300 OHM ⁼		.06x.40	1,5x10,2	.375	9,5								
SPT-1	18/3	.12x.30	3,0x7,6	.375	9,5	.625-	15,9-	.156	4,0	1804	SR 300-1*	.469	11,9
				.390	9,9								
SPT-2	18/3	.15x.40	3,8x10,2	.415	10,5								
				.422	10,7								
				.422	10,7								
SPT-2	16/3	.16x.41	4,1x10,4	.437	11,1								
Same as SR 300-1 above except													
								.100	2,5	1814	SR 302-1*	.469	11,9


Standard color black. Consult Heyco for white and other colors.

⁼ Wire is not UL/CSA covered.

*Use Elongated Hole.

¹ Maximum Panel Thickness—Part has additional clearance.

- Sizes SR 2 to SR6 for mounting hole diameters from .375" (9.5 mm) to .625" (15,9 mm).
- Protects the lifeline of your electric/electronic products by absorbing the forces of pull, push and twist that maybe exerted on the flexible power cord.
- Securely anchors, insulates, and protects cables and panel entry points.
- Standardize panel design! Fill unneeded SR mounting holes with Heyco Double "D" Plugs, page 3-23.
- See pages 3-24, 3-25, and 3-26 for SR hole punches and assembly tools.

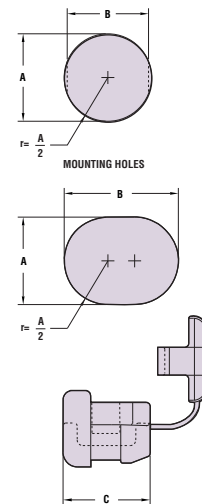

Material	6/6 Nylon
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E15331 Certified by the Canadian Standards Association File LR8919
Flammability Rating	94V-2
Material Temperature Index	257°F (125°C)—Maximum temperature on part not to exceed 221°F (105°C)

Quick Specs