

GREENLITE CABLE TIES & ACCESSORIES



NYLON CABLE TIES

- Miniature (18 lbs)
- Intermediate (40 lbs)
- Standard (50 lbs)
- Light Heavy Duty (120 lbs)
- Heavy Duty (175 lbs)

COLOR CABLE TIES

SCREW-MOUNT CABLE TIES

RELEASABLE CABLE TIES

MARKER (ID) CABLE TIES

PUSH-MOUNT CABLE TIES

DOUBLE-LOOP CABLE TIES

BEADED TIES

CABLE TIE MOUNTS

- 4-Way Adhesive-Backs
- Cradle Mounts
- Cable Clamps

TWIST-LOCKS

FASTENING TOOLS

RoHS
COMPLIANT





- UL Recognized
- Meets Military Specification
- Manufactured from 100% virgin-grade Nylon 6/6
- Self-extinguishing 94V-2
- Operating temperature range of -40°F (-4°C) to 185°F (85°C)
- Available in natural (code -9) or UV resistant black (code -0)



PART NUMBER	LENGTH <i>Inches (mm)</i>	WIDTH <i>Inches (mm)</i>	MAX BUNDLE DIAMETER <i>Inches (mm)</i>	MIN LOOP TENSILE STRENGTH	MIL SPEC	PACKAGING		
						STD.	BULK	
GT-18S1	3 1/8" (80)	0.10" (2.5)	5/8" (15)	<i>MINIATURE</i> 18 lbs (8.1 kg)	MS3367-4	100	1000	
GT-18S3	4" (100)	0.10" (2.5)	7/8" (22)			100	1000	
GT-18M1	5 1/2" (140)	0.10" (2.5)	1 3/8" (33)			100	1000	
GT-18M2	6 3/8" (160)	0.10" (2.5)	1 9/16" (40)			100	1000	
GT-18L	8" (200)	0.10" (2.5)	2" (53)			100	1000	
GT-40S	5 7/8" (150)	0.14" (3.6)	1 3/8" (35)	<i>INTERMEDIATE</i> 40 lbs (18.2 kg)	MS3367-5	100	1000	
GT-40M	8" (200)	0.14" (3.6)	2" (53)			100	1000	
GT-40L	11 1/2" (300)	0.14" (3.6)	3" (76)			100	1000	
GT-40L2	14 1/2" (370)	0.14" (3.6)	4" (102)			100	1000	
GT-50S1	6 3/8" (160)	0.19" (4.8)	1 1/2" (38)	<i>STANDARD</i> 50 lbs (23.0 kg)	MS3367-1	100	1000	
GT-50S2	7 3/8" (188)	0.19" (4.8)	1 4/5" (46)			100	1000	
GT-50M	11 1/2" (300)	0.19" (4.8)	3" (76)			MS3367-7	100	1000
GT-50L1	14 1/2" (370)	0.19" (4.8)	4" (102)			MS3367-2	100	500
GT-50L2	17" (430)	0.19" (4.8)	4 9/16" (110)			100	500	
GT-120S	8" (200)	0.30" (7.6)	1 15/16" (50)	<i>LIGHT HEAVY DUTY</i> 120 lbs (54.4 kg)	MS3367-3	100	100	
GT-120M	14 1/2" (368)	0.30" (7.6)	4" (102)			100	100	
GT-120M1	17 3/4" (450)	0.30" (7.6)	5 1/5" (132)			100	100	
GT-175S	20 3/4" (528)	0.35" (9.0)	5 1/2" (140)	<i>HEAVY DUTY</i> 175 lbs (79.4 kg)		100	100	
GT-175M	24" (609)	0.35" (9.0)	7" (178)			100	100	
GT-175L1	28" (710)	0.35" (9.0)	7 1/2" (190)			100	100	
GT-175L2	32" (812)	0.35" (9.0)	9 7/16" (239)			100	100	
GT-175L3	36" (912)	0.35" (9.0)	10 1/3" (263)			100	100	
GT-175L4	42" (1070)	0.35" (9.0)	12 3/5" (320)			100	100	
GT-175L5	48" (1220)	0.35" (9.0)	14 3/8" (365)	100	100			

NYLON CABLE TIES

GT | COLOR SERIES

The following GT nylon cable ties are available in the following colors:
(color codes in parentheses)

- Red (-2)
- Orange (-3)
- Yellow (-4)
- Green (-5)
- Blue (-6)
- Gray (-8)
- Fluorescent Pink (-FP)
- Fluorescent Orange (-FO)
- Fluorescent Yellow (-FY)



PART NUMBER	LENGTH <i>Inches (mm)</i>	WIDTH <i>Inches (mm)</i>	MAX BUNDLE DIAMETER <i>Inches (mm)</i>	MINIMUM LOOP TENSILE STRENGTH	PACKAGING	
					STD.	BULK
GT-18S3	4" (100)	0.10" (2.5)	7/8" (22)	18 lbs (8.1 kg)	100	1000
GT-50S2	7 3/8" (188)	0.19" (4.8)	1 4/5" (46)	50 lbs (22.2 kg)	100	1000
GT-50L1	14 1/2" (370)	0.19" (4.8)	4" (102)	50 lbs (22.2 kg)	100	500

CABLE TIE FASTENING TOOLS

GTG | SERIES



GTG-702 | FASTENING GUN

An efficient hand tool for fastening cable ties. Tighten and cut off excessive length in a single, simple action. Finely adjustable tension control ensures accuracy for different tensile strengths. The GTG-702 is designed for nylon cable ties up to 50 lbs (0.19" widths).

GTG-HT519 | FASTENING GUN

Designed for heavy-duty ties of 120+lb (0.30" widths or greater) tensile strength. Constructed of 100% metal, this durable hand tool will tighten and cut off excessive length. Use the GTG-HT519 to guarantee that your heavy-duty ties are securely fastened.

CABLE TIE WIDTH CHART

0.10" (18 lb)
0.14" (40 lb)
0.19" (50 lb)
0.30" (120 lb)
0.35" (175 lb)

SCREW-MOUNT CABLE TIES

GS | SERIES



- UL Recognized
- Meets Military Specification
- Integrated screw hole head for mounting and securing
- Manufactured from 100% virgin-grade Nylon 6/6
- Self-extinguishing 94V-2
- Operating temperature range of -40°F (-4°C) to 185°F (85°C)
- Available in natural (code -9) or UV resistant black (code -0)



PART NUMBER	LENGTH <i>Inches (mm)</i>	WIDTH <i>Inches (mm)</i>	MAX BUNDLE DIAMETER <i>Inches (mm)</i>	MIN LOOP TENSILE STRENGTH	SCREW SIZE	PACKAGING	
						STD.	BULK
GS-18	4 3/8" (110)	0.10" (2.5)	3/4" (18)	18 lbs (8 kg)	#4	100	1000
GS-40	6" (156)	0.14" (3.6)	1 3/8" (35)	40 lbs (18 kg)	#8	100	1000
GS-50S	8" (205)	0.19" (4.8)	2" (54)	50 lbs (23 kg)	#10	100	1000
GS-50M	12 1/2" (300)	0.19" (4.8)	3" (79)		#10	100	1000
GS-50L	14 1/2" (370)	0.19" (4.8)	4" (102)		#10	100	100
GS-120	15" (380)	0.30" (7.6)	4 1/8" (104)	120 lbs (54 kg)	#10	100	100

RELEASABLE CABLE TIES

GR | SERIES



- UL Recognized
- Reusable design
- Simply press the tab at the head to release the lock
- Manufactured from 100% virgin-grade Nylon 6/6
- Self-extinguishing 94V-2
- Operating temperature range of -40°F (-4°C) to 185°F (85°C)
- Available in natural (code -9) or UV resistant black (code -0)




PART NUMBER	LENGTH <i>Inches (mm)</i>	WIDTH <i>Inches (mm)</i>	MAX BUNDLE DIAMETER <i>Inches (mm)</i>	MIN LOOP TENSILE STRENGTH	PACKAGING	
					STD.	BULK
GR-75S	7 7/8" (200)	0.30" (7.6)	2" (50)	50 lbs (23 kg)	100	100
GR-75M	11 3/4" (300)	0.30" (7.6)	3" (80)		100	100

MARKER (IDENTIFICATION) CABLE TIES

GM | SERIES

- UL Recognized
- Integrated marking pads
- Manufactured from 100% virgin-grade Nylon 6/6
- Self-extinguishing 94V-2
- Operating temperature range of -40°F (-4°C) to 185°F (85°C)

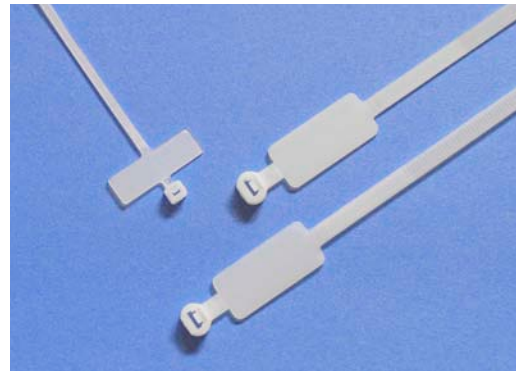

PART NUMBER	LENGTH <i>Inches (mm)</i>	WIDTH <i>Inches (mm)</i>	MAX BUNDLE DIAMETER <i>Inches (mm)</i>	MIN LOOP TENSILE STRENGTH	MARKING PAD SIZE <i>L X W (inches)</i>	PACKAGING	
						STD.	BULK
GM-18	3 7/8" (205)	0.10" (2.5)	3/4" (20)	18 lbs (8 kg)	0.3" x 1"	100	1000
GM-50S	8 5/8" (220)	0.19" (4.8)	1 5/8" (43)	50 lbs (23 kg)	1.1" x 0.5"	100	1000
GM-50M	11 3/4" (300)	0.19" (4.8)	2 3/4" (70)		1.1" x 0.5"	100	100
GM-50L	14 1/2" (370)	0.19" (4.8)	3 1/2" (88)		1.1" x 0.5"	100	100

PUSH-MOUNT CABLE TIES

GP | SERIES




- UL Recognized
- Designed to mount in panel holes
- Two mount head designs available
- Manufactured from 100% virgin-grade Nylon 6/6
- Self-extinguishing 94V-2
- Operating temperature range of -40°F (-4°C) to 185°F (85°C)





PART NUMBER	LENGTH <i>Inches (mm)</i>	WIDTH <i>Inches (mm)</i>	MAX BUNDLE DIAMETER <i>Inches (mm)</i>	HOLE DIAMETER <i>Inches (mm)</i>	PANEL THICKNESS <i>Inches (mm)</i>	MIN LOOP TENSILE STRENGTH	PACKAGING	
							STD.	BULK
GP-50	7 5/8 (195)	0.19" (4.8)	1.77" (45)	0.252 (6.4)	0.126" (3.2)	50 lbs (23 kg)	100	100
GP-50A	7 7/8 (200)	0.19" (4.8)	1.81" (46)	0.248 (6.3)	0.141" (3.6)		100	100

DOUBLE LOOP CABLE TIES

GDL | SERIES




- UL Recognized
- Designed to tie two cable bundles together
- Manufactured from 100% virgin-grade Nylon 6/6
- Self-extinguishing 94V-2
- Natural operating temperature range of -40°F (-4°C) to 185°F (85°C)

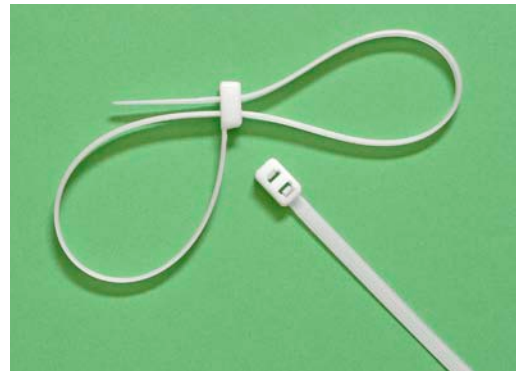


PART NUMBER	LENGTH <i>Inches (mm)</i>	WIDTH <i>Inches (mm)</i>	MAX BUNDLE DIAMETERS <i>Inches (mm)</i>	MIN LOOP TENSILE STRENGTH	PACKAGING	
					STD.	BULK
GDL-50S	7 7/8" (200)	0.19" (4.8)	1.85" (47) + 1.77" (45)	50 lbs (23 kg)	100	100
GDL-50M	11 4/5" (300)	0.19" (4.8)	2.83" (72) + 2.76" (70)		100	100
GDL-50L	14 1/2" (370)	0.19" (4.8)	3.94" (100) + 3.82" (97)		100	100

BEADED TIES

GBT | SERIES




- UL Recognized
- Quickly secure and release bundles
- Manufactured from 100% virgin-grade Nylon 6/6
- Self-extinguishing 94V-2
- Operating temperature range of -40°F (-4°C) to 185°F (85°C)

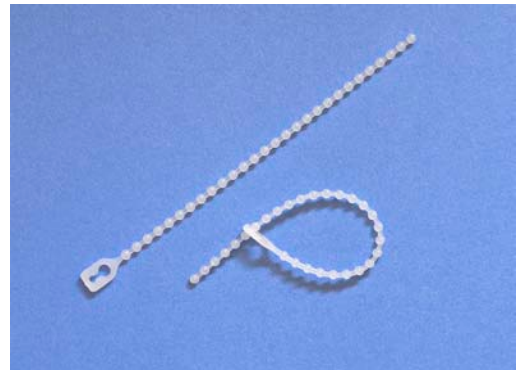

PART NUMBER	LENGTH <i>Inches (mm)</i>	MAX BUNDLE DIAMETER <i>Inches (mm)</i>	MIN LOOP TENSILE STRENGTH	PACKAGING	
				STD.	BULK
GBT-100	4 1/5" (105)	1 1/8" (29)	8.8 lbs (4 kg)	100	1000

ADHESIVE-BACKED MOUNTING BASES

GMB | SERIES




- For attaching bundles to flat surfaces via adhesive backing
- Four way tie insertion, allowing for ties to be easily mounted from any of the four sides
- Integrated centered screw mount hole for optional screw mounting
- Manufactured from 100% virgin-grade Nylon 6/6
- Complete stock in natural (code -9) or UV resistant black (code -0)



PART NUMBER	MOUNTING TYPE	DIMENSIONS <i>L X W X H</i> <i>Inches (mm)</i>	Cable Ties Accepted (Width) <i>Inches (mm)</i>	PACKAGING	
				STD.	BULK
GMB-4A	4 way adhesive & #4 screw	0.75" x 0.75" x 0.21" (19 x 19 x 5.3)	up to 0.14" (3.6)	100	1000
GMB-4AS	4 way adhesive & #10 screw	1.1" x 1.1" x 0.28" (19 x 19 x 5.3)	Up to 0.19" (4.8)	100	500

CRADLE MOUNTS

GCM | SERIES

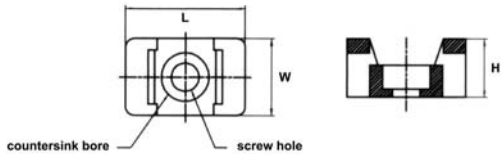


- Low-profile cradle design with thick and strong support arms
- Integrated screw hole for secure screw mounting
- Manufactured from 100% virgin-grade Nylon 6/6
- Self-extinguishing 94V-2
- Natural operating temperature range of -40°F (-4°C) to 185°F (85°C)



PART NUMBER	MOUNTING TYPE	DIMENSIONS <i>L X W X H</i> <i>Inches (mm)</i>	Cable Ties Accepted (Width) <i>Inches (mm)</i>	PACKAGING	
				STD.	BULK
GCM-S	#6 screw (0.276" countersink bore)	0.587 x 0.374 x 0.283 (14.9 x 9.5 x 7.2)	up to 0.19 (4.8)	100	1000
GCM-L	#10 screw (0.378" countersink bore)	0.862 x 0.634 x 0.382 (21.9 x 16.1 x 9.7)	Up to 0.35" (9.0)	100	500

CABLE CLAMPS

GCC | SERIES




- Insert cables in and clamp down with a screw
- Screw-mounts to any hard surface
- Open design for easy cable entry
- Manufactured from 100% virgin-grade Nylon 6/6
- Self-extinguishing 94V-2
- Operating temperature range of -40°F (-4°C) to 185°F (85°C)
- Available in natural (code -9) or UV resistant black (code -0)



PART NUMBER	MAX BUNDLE DIAMETER <i>Inches (mm)</i>	LENGTH <i>Inches (mm)</i>	WIDTH <i>Inches (mm)</i>	THICKNESS <i>Inches (mm)</i>	SCREW SIZE	PACKAGING	
						STD.	BULK
GCC-18	1/8" (3.2)	0.63" (16.0)	0.36" (9.1)	0.059" (1.5)	#10	100	1000
GCC-316	3/16" (4.8)	0.73" (18.5)	0.36" (9.1)		#10	100	1000
GCC-14	1/4" (6.4)	0.77" (19.6)	0.36" (9.1)		#10	100	1000
GCC-516	5/16" (8.0)	0.83" (21.1)	0.36" (9.1)		#10	100	1000
GCC-38	3/8" (9.5)	0.88" (22.6)	0.36" (9.2)		#10	100	1000
GCC-12	1/2" (12.7)	1.12" (28.5)	0.50" (12.7)		#10	100	1000
GCC-916	9/16" (14.3)	1.20" (30.5)	0.50" (12.7)		#10	100	1000
GCC-34	3/4" (19.1)	1.43" (36.3)	0.50" (12.7)		#10	100	1000
GCC-118	1 1/8" (28.6)	1.83" (46.5)	0.50" (12.7)		#10	100	1000

TWIST LOCKS

GTL | SERIES



- "Purse-lock" style clamp for extremely fast bundling and unbundling
- Excellent for cable organization
- Manufactured from 100% virgin-grade Nylon 6/6
- Self-extinguishing 94V-2
- Operating temperature range of -40°F (-4°C) to 185°F (85°C)



PART NUMBER	MAX BUNDLE DIAMETER <i>Inches (mm)</i>	LENGTH <i>Inches (mm)</i>	COLOR	PACKAGING	
				STD.	BULK
GTL-E	0.18" (4.5)	0.83" (21.0)	Natural	100	1000
GTL-G	0.41" (10.5)	1.22" (30.9)	Natural	100	1000
GTL-H	0.55" (14.0)	1.38" (35.1)	Natural	100	1000
GTL-K	0.87" (22.0)	1.79" (45.5)	Natural	100	1000